

## SIT-LOCK® self locking elements

### Advantages of SIT-LOCK® on the shaft-hub connection compared with traditional systems

#### Easy assembly and disassembly

Both actions take place by locking and unlocking the clamping screws with common tools.  
The use of a torque wrench is only necessary when a more precise torque is required.

#### Superior holding power

The action of the clamping cones creates shaft clamping torque superior to a normal keyed hub.

#### Overload protection

When the pre-set torque is exceeded SIT-LOCK® will slip, preventing the connected elements from being broken.

Note: SIT-LOCK® units are not friction couplings so, excessive slip will cause damage.

#### Easy adjustment

Combining the SIT-LOCK® design of smooth cone action with superior holding power, the hub can be clamped at any position along a shaft, eliminating the need for lock washers, spacers, stop rings, etc.

#### Precision location

With the SIT-LOCK® smooth cone action, the SIT-LOCK® is ideal for clamping cams, timing devices, and indexing mechanisms accurately and precisely.

#### Temperature

-20 °C ÷ 150 °C

#### Unlimited use possibilities

SIT-LOCK® units are suitable to connect any type of hub (flywheels, chainwheels, gears, levers, pulleys, eccentrics, coupling, etc).

#### Various solutions in stock

Available in stock in 10 different types, SIT-LOCK® units can be utilized in a varied range of industrial applications

#### Order form

SIT-LOCK®	CAL	1	F25 /50
CAL: SIT-LOCK® self locking element			
Type			
Shaft diameter			
External diameter (hub bore)			

### Performances

Given values of transmissible torque, axial force, and pressure between shaft and hub are valid for a lubricated installation (friction coefficient  $\mu=0,12$ ). Both hub and shaft, as well as locking unit's contact surfaces and screws, should be lubricated.

Locking unit and screws are supplied already oiled.

Always consider tolerances and roughness values per single locking unit.

**To avoid decrease of locking unit performances, do not use molybdenum disulfide lubricant or other substances that drastically reduce coefficient of friction.**

### Design procedure

For a correct functioning of SIT-LOCK®, the transmissible torque  $M_T$  (stated in this catalogue) must always exceed the maximum torque in operation. So, in selecting the SIT-LOCK® dimensions, you must consider the start up torque could be even 4 times larger than the nominal one.

The transmissible axial forces ( $F_{ax}$ ) given in the tables are valid for cases where there is no torque. If it is necessary to transmit both a torque and an axial force (ex. helical gear), the following formula must be used:

$$M_T \geq \sqrt{M_a^2 + \left(\frac{F_{ax} \cdot d}{2000}\right)^2} \quad [Nm]$$

where:

$M_a$  = maximum torque to be transmitted [Nm]

$F_{ax}$  = axial force in operation [N]

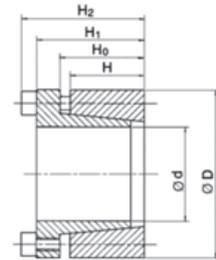
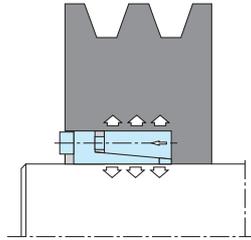
$d$  = shaft diameter [mm]



## SIT-LOCK® 6 - Self-Centering without Flange Short Version

Locking assembly with single taper design. Provides good concentricity and is self centering. A small axial movement of the hub during the installation operation may occur.

Applications requiring accurate axial positioning are not recommended with this type of locking assembly. SITLOCK® 6 is suitable for applications with medium torques.



### Installation

Carefully clean contact surfaces of shaft and hub. Then, lightly oil both surfaces with standard mineral oil. Position the SIT-LOCK® on the shaft and into the hub machined bore. Align them as required by the application. Gradually and uniformly tighten the locking screws to the tightening torque (Ms).

You must tighten the screws in diametrically opposite sequence in stages:

- hand tighten the screws until the surfaces are in contact

- carefully check the position of the hub on the shaft
- tighten the screws to half the value of the tightening torque (Ms) stated in the catalogue
- repeat the operation until the tightening torque is reached using the dynamometric screw-driver
- check every locking screw to insure it has been tightened to the specific tightening torque

*Do not use lubricant like "Molykote" or molybdenum disulfide based oils.*

### Removal

Gradually loosen all locking screws. Remove and transfer the screws into the releasing tapped holes and tighten them until the SIT-LOCK® is released.

*Note: To reuse the locking element, carefully oil the screws and the conical surfaces, then follow installation instructions.*

### Concentricity

For self-centering locking assemblies, the clamping element has a centering effect and the concentricity error can be considered 0.02-0.04 mm.

<b>Maximum allowable roughness</b>
Rt 16 µm
<b>Maximum recommended tolerance</b>
shaft h 8 - hub H 8

SIT-LOCK® 6

Dimensions [mm]					Performances		Pressure [N/mm <sup>2</sup> ]		Clamping screws (DIN 912 - 12,9)		
d x D	H	H <sub>0</sub>	H <sub>1</sub>	H <sub>2</sub>	M <sub>T</sub> [Nm]	F <sub>ax</sub> [kN]	p <sub>w</sub>	p <sub>n</sub>	N°	Type	M <sub>s</sub> [Nm]
20 x 47	17	22	28	34	380	38	297	126	5	M6	14
22 x 47	17	22	28	34	419	38	270	126	5	M6	14
24 x 50	17	22	28	34	457	38	247	119	5	M6	14
25 x 50	17	22	28	34	571	46	285	142	6	M6	14
28 x 55	17	22	28	34	639	46	254	130	6	M6	14
30 x 55	17	22	28	34	685	46	237	130	6	M6	14
32 x 60	17	22	28	34	974	61	297	158	8	M6	14
35 x 60	17	22	28	34	1.065	61	271	158	8	M6	14
38 x 65	17	22	28	34	1.157	61	250	146	8	M6	14
40 x 65	17	22	28	34	1.218	61	237	146	8	M6	14
42 x 75	20	26	34	42	2.060	98	310	173	7	M8	35
45 x 75	20	26	34	42	2.207	98	289	173	7	M8	35
48 x 80	20	26	34	42	2.354	98	271	163	7	M8	35
50 x 80	20	26	34	42	2.452	98	260	163	7	M8	35
55 x 85	20	26	34	42	3.082	112	270	175	8	M8	35
60 x 90	20	26	34	42	3.363	112	248	165	8	M8	35
65 x 95	20	26	34	42	4.098	126	257	176	9	M8	35
70 x 110	24	30	40	50	6.240	178	281	179	8	M10	70
75 x 115	24	30	40	50	6.685	178	263	171	8	M10	70
80 x 120	24	30	40	50	7.131	178	246	164	8	M10	70
85 x 125	24	30	40	50	8.524	201	261	177	9	M10	70
90 x 130	24	30	40	50	9.025	201	246	171	9	M10	70
95 x 135	24	30	40	50	10.585	223	259	182	10	M10	70
100 x 145	26	32	44	56	13.045	261	266	184	8	M12	125
110 x 155	26	32	44	56	14.349	261	242	172	8	M12	125
120 x 165	26	32	44	56	17.610	294	250	181	9	M12	125
130 x 180	34	40	54	66	25.437	391	235	170	12	M12	125
140 x 190	34	40	54	68	28.155	402	224	165	9	M14	190
150 x 200	34	40	54	68	33.518	447	232	174	10	M14	190
160 x 210	34	40	54	68	39.327	492	240	183	11	M14	190
170 x 225	44	50	64	78	45.584	536	190	144	12	M14	190
180 x 235	44	50	64	78	48.265	536	180	138	12	M14	190
190 x 250	44	50	64	78	63.683	670	213	162	15	M14	190
200 x 260	44	50	64	78	67.035	670	202	155	15	M14	190

Notes:

Dimensions representing the total length of the hub are indicative; they are calculated according to the geometric rules.

For assemblies requiring larger dimensions, contact our Technical Department.

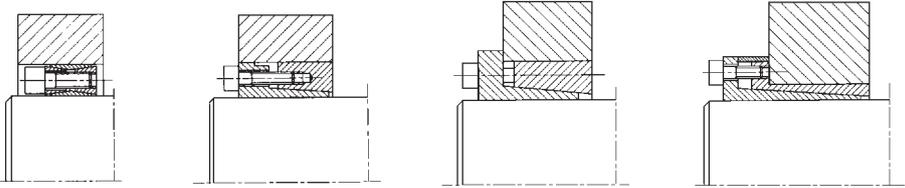
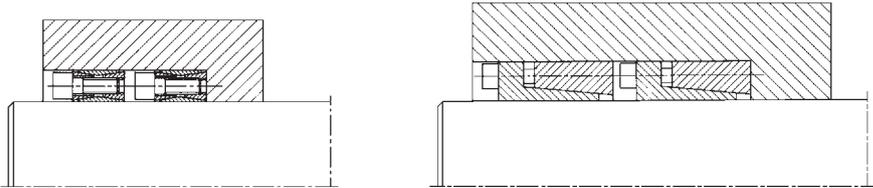
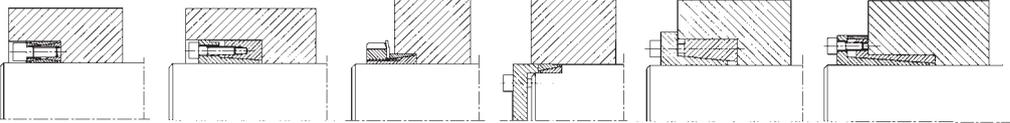
M <sub>S</sub>	Screw tightening torque	Nm
M <sub>T</sub>	Transmissible torque moment	Nm
F <sub>ax</sub>	Transmissible axial load	N
p <sub>w</sub>	Shaft pressure	N/mm <sup>2</sup>
p <sub>n</sub>	Hub pressure	N/mm <sup>2</sup>



## Design of hub outside minimum diameter

When using the locking units, the shaft-hub connection is characterized by a pressure on the hub surface, which is exerted by the locking unit outer ring when the clamping screws are tightened to the stated value. It is important to design correctly the hub outside diameter. The following table summarizes the procedure as a simple calculation. To determine the hub outside minimum

diameter, simply multiply the factor K by the SIT-LOCK® outside diameter to obtain the hub outside minimum diameter. The factor K varies depending on the yield limit of hub material, the hub surface pressure (Pn) and the factor (x), variable according to the application type (A, B, C).

<p>Installation type A (<math>L_M \cong L_C</math>) X = 1</p> 
<p>Installation type B (<math>L_M \cong 2 L_C</math>) X = 0,8</p> 
<p>Installation type C (<math>L_M &gt; 2 L_C</math>) X = 0,6</p> 
<p><b>Hub min diameter <math>D \times K</math></b> for: K = factor stated in the table D = SIT-LOCK® outside diameter</p>

$L_M$	Hub length	mm
$L_C$	SIT-LOCK® length	mm

### Hollow shaft

For application with locking-assemblies on hollow shaft, it is important to scale both hub minimum diameter and hollow

shaft diameter. Contact our Technical Department for design.

# Coefficient K

Hub surface pressure		Yield limit of hub material $\sigma_{02}$ [N/mm <sup>2</sup> ]										
		150	180	200	220	250	270	300	350	400	450	600
P <sub>n</sub> [N/mm <sup>2</sup> ]	Application	Hub material										Heat treatment steel
		GG 20	GG 25 GS 38	GG 30 GTS 35	GS 45 ST 37-2	GG 40 GS 52	ST 50-2 C 35	GG 50 GS 60 ST 60-2	GG 60 GS 62 ST 70-2	GG 70 GS 70 C 60		
60	C	1,29	1,26	1,21	1,19	1,16	1,15	1,13	1,11	1,10	1,09	1,07
	B	1,40	1,31	1,25	1,24	1,23	1,21	1,19	1,16	1,13	1,12	1,09
	A	1,53	1,43	1,37	1,33	1,29	1,26	1,23	1,19	1,17	1,15	1,11
65	C	1,31	1,26	1,23	1,21	1,19	1,16	1,14	1,12	1,11	1,10	1,08
	B	1,45	1,36	1,31	1,29	1,25	1,23	1,21	1,17	1,15	1,13	1,10
	A	1,61	1,46	1,41	1,36	1,31	1,29	1,25	1,21	1,19	1,17	1,13
70	C	1,35	1,27	1,25	1,23	1,19	1,17	1,16	1,13	1,12	1,11	1,08
	B	1,49	1,39	1,35	1,31	1,26	1,24	1,21	1,19	1,16	1,14	1,11
	A	1,66	1,51	1,46	1,41	1,35	1,31	1,26	1,23	1,21	1,18	1,14
75	C	1,31	1,29	1,26	1,24	1,21	1,19	1,16	1,15	1,13	1,12	1,09
	B	1,53	1,43	1,37	1,33	1,29	1,26	1,23	1,19	1,17	1,15	1,12
	A	1,75	1,56	1,49	1,43	1,37	1,34	1,31	1,26	1,21	1,19	1,14
80	C	1,40	1,32	1,29	1,26	1,22	1,21	1,19	1,16	1,14	1,12	1,09
	B	1,59	1,46	1,40	1,36	1,31	1,28	1,25	1,21	1,19	1,16	1,12
	A	1,82	1,62	1,54	1,47	1,40	1,37	1,32	1,27	1,23	1,21	1,15
85	C	1,43	1,35	1,31	1,28	1,24	1,22	1,20	1,17	1,15	1,13	1,10
	B	1,64	1,50	1,43	1,39	1,33	1,30	1,27	1,23	1,20	1,17	1,13
	A	1,91	1,68	1,58	1,51	1,43	1,40	1,35	1,29	1,25	1,22	1,16
90	C	1,47	1,37	1,33	1,29	1,26	1,23	1,21	1,18	1,16	1,14	1,10
	B	1,70	1,54	1,47	1,41	1,35	1,32	1,29	1,24	1,21	1,19	1,14
	A	2,01	1,74	1,63	1,55	1,47	1,42	1,37	1,31	1,27	1,23	1,17
95	C	1,50	1,40	1,35	1,31	1,27	1,25	1,22	1,19	1,16	1,15	1,11
	B	1,76	1,58	1,50	1,44	1,38	1,35	1,31	1,26	1,22	1,20	1,15
	A	2,12	1,81	1,69	1,60	1,50	1,45	1,40	1,33	1,28	1,25	1,18
100	C	1,54	1,42	1,37	1,33	1,29	1,26	1,23	1,20	1,17	1,15	1,12
	B	1,82	1,62	1,54	1,47	1,40	1,37	1,32	1,27	1,23	1,21	1,15
	A	2,25	1,88	1,74	1,64	1,54	1,49	1,42	1,35	1,30	1,26	1,19
105	C	1,57	1,45	1,40	1,35	1,30	1,28	1,25	1,21	1,18	1,16	1,12
	B	1,89	1,67	1,57	1,51	1,43	1,39	1,34	1,29	1,25	1,22	1,16
	A	2,39	1,96	1,80	1,69	1,57	1,52	1,45	1,37	1,32	1,28	1,20
110	C	1,61	1,48	1,42	1,37	1,32	1,29	1,26	1,22	1,19	1,17	1,13
	B	1,97	1,72	1,61	1,54	1,45	1,41	1,36	1,30	1,26	1,23	1,17
	A	2,56	2,05	1,87	1,74	1,61	1,55	1,48	1,39	1,34	1,29	1,21
115	C	1,65	1,51	1,44	1,37	1,34	1,31	1,27	1,23	1,20	1,18	1,13
	B	2,05	1,77	1,65	1,57	1,48	1,44	1,38	1,32	1,27	1,24	1,18
	A	2,76	2,14	1,94	1,80	1,65	1,59	1,51	1,42	1,35	1,31	1,22
120	C	1,70	1,54	1,47	1,40	1,35	1,32	1,29	1,24	1,21	1,19	1,14
	B	2,14	1,82	1,70	1,61	1,51	1,46	1,40	1,34	1,29	1,25	1,19
	A	3,01	2,25	2,01	1,85	1,70	1,62	1,54	1,44	1,37	1,32	1,23
125	C	1,74	1,57	1,49	1,44	1,37	1,34	1,30	1,25	1,22	1,19	1,14
	B	2,25	1,88	1,74	1,64	1,54	1,49	1,42	1,35	1,30	1,26	1,19
	A	3,33	2,36	2,09	1,92	1,74	1,66	1,57	1,46	1,39	1,34	1,25
130	C	1,79	1,60	1,52	1,46	1,39	1,36	1,31	1,26	1,23	1,20	1,15
	B	2,36	1,94	1,79	1,68	1,57	1,51	1,45	1,37	1,31	1,28	1,20
	A	3,75	2,50	2,18	1,98	1,79	1,70	1,60	1,49	1,41	1,36	1,26
135	C	1,84	1,62	1,55	1,48	1,41	1,37	1,33	1,28	1,24	1,21	1,16
	B	2,49	2,01	1,84	1,72	1,60	1,54	1,47	1,39	1,33	1,29	1,21
	A	4,37	2,66	2,28	2,05	1,84	1,74	1,63	1,51	1,43	1,37	1,27
140	C	1,89	1,67	1,57	1,51	1,43	1,39	1,34	1,29	1,25	1,22	1,16
	B	2,64	2,08	1,89	1,76	1,63	1,55	1,49	1,40	1,34	1,30	1,22
	A	5,40	2,84	2,39	2,13	1,89	1,79	1,67	1,54	1,45	1,39	1,28
145	C	1,95	1,70	1,60	1,53	1,45	1,41	1,36	1,30	1,26	1,23	1,17
	B	2,81	2,16	1,95	1,81	1,66	1,59	1,51	1,42	1,36	1,31	1,23
	A	7,67	3,06	2,51	2,22	1,95	1,83	1,70	1,56	1,47	1,41	1,29
150	C	2,01	1,74	1,63	1,55	1,47	1,42	1,37	1,31	1,27	1,24	1,17
	B	3,01	2,25	2,01	1,85	1,70	1,62	1,54	1,44	1,37	1,32	1,24
	A	—	3,33	2,66	2,31	2,01	1,88	1,74	1,59	1,49	1,42	1,30
155	C	2,07	1,78	1,66	1,58	1,49	1,44	1,39	1,32	1,28	1,25	1,18
	B	3,26	2,34	2,07	1,90	1,73	1,66	1,56	1,46	1,39	1,34	1,24
	A	—	3,67	2,81	2,41	2,07	1,93	1,78	1,62	1,52	1,44	1,31
160	C	2,14	1,82	1,70	1,61	1,51	1,46	1,40	1,34	1,29	1,25	1,19
	B	3,56	2,44	2,14	1,95	1,77	1,68	1,59	1,48	1,40	1,35	1,25
	A	—	4,13	3,01	2,53	2,14	1,99	1,82	1,65	1,54	1,48	1,32
165	C	2,22	1,87	1,73	1,63	1,53	1,48	1,42	1,35	1,30	1,26	1,19
	B	3,97	2,56	2,22	2,01	1,81	1,72	1,61	1,50	1,42	1,36	1,26
	A	—	4,81	3,24	2,66	2,22	2,05	1,87	1,68	1,56	1,48	1,34

Note: p<sub>n</sub> is stated in the dimensional table of each of the locking assemblies. Installation type (A, B, C) are stated in the previous page.

## Example of calculation procedure

### Design data

- Power transmission element to be connected: V-pulley
- Shaft diameter: 50 mm
- Maximum Torque in operation (Ma): 1.500 Nm
- V-pulley material: cast iron GG20
- Yield limit of V-pulley material: 150 N/mm<sup>2</sup>

### Calculation

- SIT-LOCK® type: for this kind of application SIT-LOCK® 1 is suggested
- Size selection: 50 x 80 mm (see table SIT-LOCK® 1)
- Performance control: verify  $M_T \geq M_a$   
From the table obtain  $M_T = 1.889$  Nm, so the above condition is verified
- Tolerance: h11 for the shaft - H11 for the SIT-LOCK® bore
- Roughness:  $R_t \leq 16$
- Screws tightening torque:  $M_s = 37$  Nm (see table SIT-LOCK® 1)
- Hub surface pressure: from the table you can find the value  $P_n = 125$  N/mm<sup>2</sup>
- Application type: in this case it is preferable to adopt the application "C" with the centering guide between shaft and hub

- Coefficient K : obtained through the table "Coefficient K" by considering the following information:
  - yield limit of hub material = 150 N/mm<sup>2</sup>
  - hub surface pressure = 125 N/mm<sup>2</sup>
  - installation C
 Then,  $K = 1,74$

- Hub outside minimum diameter:

$$\text{Hub } D_{\min} \geq D \cdot K$$

for

- D = SIT-LOCK® outside diameter [mm]
- K = 1,74

Then, hub  $D_{\min} = (80 \cdot 1,74) = \mathbf{140 \text{ [mm]}}$

## DIN 912

Screw diameter	P <sub>v</sub> [N]			M <sub>s</sub> [Nm]		
	8,8	10,9	12,9	8,8	10,9	12,9
M2,5	1.600	2.140	2.565	0,76	1,0	1,2
M3	2.210	3.110	3.730	1,3	1,9	2,2
M4	3.900	5.450	6.550	2,9	4,1	4,9
M5	6.350	8.950	10.700	6	8,5	10
M6	9.000	12.600	15.100	10	14	17
M7	13.200	18.500	22.200	16	23	28
M8	16.500	23.200	27.900	25	35	41
M9	22.000	30.900	37.100	36	51	61
M10	26.200	36.900	44.300	49	69	83
M12	38.300	54.000	64.500	86	120	145
M14	52.500	74.000	88.500	135	190	230
M16	73.000	102.000	123.000	210	295	355
M18	88.000	124.000	148.000	290	405	485
M20	114.000	160.000	192.000	410	580	690
M22	141.000	199.000	239.000	550	780	930
M24	164.000	230.000	276.000	710	1.000	1.200
M27	215.000	302.000	363.000	1.050	1.500	1.800
M30	262.000	368.000	442.000	1.450	2.000	2.400