


FLEXLINE 6000





The high flexible multispiral compact hydraulic hose with reduced bend radii and bending force meets ISO 18752 – CC and exceeds SAE100 R15 suitable with bio-degradable hydraulic fluids

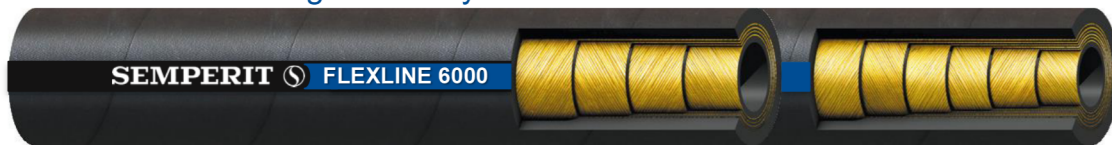

HOSE :

Tube	Synthetic nitrile rubber, suitable for hydraulic fluids (HL, HLP, HLPD, HVLP, HFA, HFAS, HFB, HFC) and bio-degradable hydraulic fluids
Reinforcement	Four (4S) or six (6S) high tensile steel wire
Cover	Abrasion and ozone resistant synthetic rubber – MSHA approved Note: MSHA and SemperRock cover available
Temperature range	-40° C to 121° C / -40° F to +250° F (max 125° C/257° F intermittent)
Standard Branding	Mylar Tape

SEMPERIT  FLEXLINE 6000 DN19 3/4" WP 420 BAR 6090 PSI ISO 18752-CC/exc. SAE100 R15 MSHA IC-8/19 .Q.. 

Nominal Ø		Reinforcement layers	Inside Ø	Spiral Ø	Outside Ø	Working pressure		Test pressure	Burst pressure	Bend radius	Weight
mm	inch		mm	mm	mm	bar	psi	bar	bar	mm	kg/m
10	3/8	4	9,9	17,7	20,2	420	6090	840	1680	65	0,69
12	1/2	4	13,0	20,6	22,9	420	6090	840	1680	90	0,79
16	5/8	4	16,4	24,2	26,5	420	6090	840	1680	100	1,05
19	3/4	4	19,5	28,2	30,7	420	6090	840	1680	120	1,46
25	1	4	26,0	35,4	37,5	420	6090	840	1680	150	1,94
32*	1-1/4	4	32,5	43,5	47,3	420	6090	840	1680	400	3,01
32*	1-1/4	6	32,5	46,9	50,5	420	6090	840	1680	400	3,77
38	1-1/2	6	38,7	53,9	57,4	420	6090	840	1680	460	4,79
51	2	6	51,1	67,9	71,5	420	6090	840	1680	540	6,75

*4-layer hose is standard, 6-layer is available on request

Publication date: April 2020 - Subject to changes without notice

Impulse tested up to 500.000 cycles acc. to ISO6803:2008

Please note: Before using our products with new or untested media, or for applications that are not clearly indicated in the product information, written advice must be obtained from a specialist dealer or a Semperit application engineer. For safety reasons, all products must be inspected regularly for operational safety and replaced in the event of any damage (especially of the cover) or unusual signs of wear and tear. All products must be stored, handled and maintained in accordance with all our respective instructions and DIN 7716:1982. The information in our catalogue as well as each individual datasheet is subject to change at any time without notice since we are constantly developing and improving our products and due to constant technical developments after the latest release date of the catalogue and/or individual datasheets. In order to always have the latest product and safety information make sure you visit our website (www.semperflex.com) regularly or contact one of our specialist dealers or a Semperit application engineer. All contracts with Semperflex are exclusively subject to our general terms and conditions (available at www.semperitgroup.com).

Important notice: Our catalogue and any individual datasheet have been prepared with great care in order to provide you with all the information you need. The information contained therein is based on the state-of-the-art industrial technology and many years of experience and testing; whenever indicated for a certain product, we also confirm conformity with the resistance requirements of the media indicated in the product catalogue. However, the individual conditions of storage, maintenance and use decisively affect the safe and durable use of each product. The quality and safety of our products as indicated in the catalogue or individual datasheets are therefore strictly subject to the continuous observance of all specifications and restrictions in our written product information, applicable laws and standards. We reject any liability for safety issues or other consequences due to improper product choice, maintenance or handling (e.g. squashing, rupturing, stretching or filling with non-approved media). Our products must not be used in airplanes or other aerial vehicles under any circumstance. Unless specified otherwise, all hoses are manufactured according to EN853, 856, 857 and SAE J 517.